



MCON SUPER COAT POWDER

ACRYLIC BASED POWDER
PUTTY FOR INTERNAL WALLS



Product Description :-

MCON SUPER COAT POWDER is an acrylic polymer based water resistant wall putty in powder form, which requires precise quantity of water to make putty for substrate. This is especially used to seal the pinholes and the blow holes getting exposed on concrete/plastered surfaces and to provide smooth even surface for next coating. It can be applied on internal and as well as external surfaces. It gives more adhesion strength and increase the life of paints.

Features & Benefits :-

- Provides smooth, silky and featheredged finish to substrate to facilitate better texture of paint.
- Due to good bonding property it is more durable.
- Excellent finishing and easy to apply.
- Synthetically bound ready to use compound for inert filler material.
- Only precise quantity of water to be added.

Areas of Application :-



Plywood



Gypsum Boards



Ceilings




*Old Painted
Areas*

Easy To Apply :-

Surface Preparation :-

- Make sure that the surface is absolutely clean, dry and free from dust, grease and foreign materials.
- There should be a time gap of at least 10 days before MCON SUPER COAT POWDER application is done on newly plastered surfaces.
- Ensure that the surface is fairly even.
- If concrete surfaces is to be painted, it shall be washed with a water jet at 3000 psi and all loose concrete should be removed. All pin holes and blow holes should get opened.

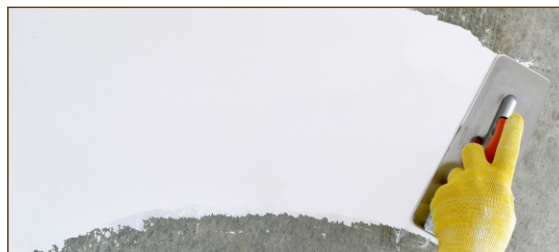



MCON SUPER COAT POWDER

ACRYLIC BASED POWDER
PUTTY FOR INTERNAL WALLS



Easy To Apply :-

Mixing :-

- MCON SUPER COAT POWDER is a ready to use material.
- Take 2.5 to 3 parts of powder to 1 part of water by volume and mix it thoroughly for 10-15 mins.

Coating Application :-

- Apply the prepared material with putty knife from bottom to top by ensuring complete filling of holes with putty material and featheredged finish.
- The coating should be about 0.5 mm thick.
- Second coat of MCON SUPER COAT POWDER depends up on the exposed surface after first coat (generally both coat do not exceed 1 mm) and leave the surface to dry overnight. The drying time of each coat should be 4 hours, but will vary from surface to surface.(depending upon atmospheric conditions).

Finishing :-

- Make sure that the material has fully covered the substrate and dried. If putty applied surface is rough, surface should be made smooth by rubbing suitable emery paper on it. Ensure that the paper is fine and does not cause scratches on the MCON SUPER COAT POWDER coating area.

Painting :-

- The smooth surface finished with MCON SUPER COAT POWDER does not require any putty or primer before paint application. Just apply any paint as per the manufacturer's standard specification.



Coverage :-

300 Sq.ft / 25 Kg Bag @ 0.5 mm Double Coat



Packing :-

25 Kgs

Shelf Life :-

- 4 months in original packing if stored at room temperature i.e.25°C.

An ISO 9001 : 2015 - An ISO 14001 : 2015 - AN BS OHSAS 45001 : 2018

MCON RASAYAN PVT. LTD.

Trusted Partner In Construction Chemicals

Corporate Office : Gala No. 6 , Bardanwala Estate , Bandivali Hill Road , Jogeshwari (W) , Mumbai - 400 102 , Maharashtra , India .

Consumer Care : 022 - 26790031 • Email Id : info@mconrasayan.com • Visit us : www.mconrasayan.com • Follow Us :   